

REC'D 21 FEB 2005

WIPO

PCT

11 TB/05/050453

PA 1280761

# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

February 07, 2005

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.


APPLICATION NUMBER: 60/542,439 ✓

FILING DATE: February 05, 2004 ✓

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS

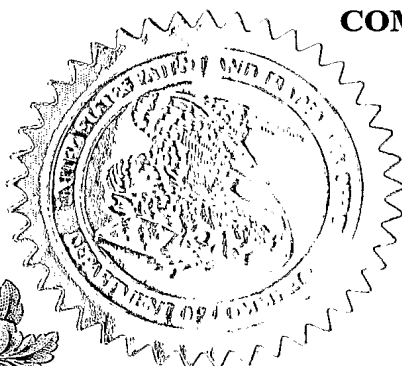

*H. L. Jackson*  
H. L. JACKSON  
Certifying Officer

16569 U.S. PTO

Attorney Docket No. US04 0112P

## PROVISIONAL APPLICATION COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No.: EV417138636US


31355 U.S. PTO  
60/542439

020504

1. INVENTOR(S)		
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)
TIM	WHITTAKER	CAMBRIDGE, GREAT BRITAIN
2. TITLE OF THE INVENTION		
DIGITALLY ENHANCED CORDLESS TELEPHONE AS PART OF A MEDIA ACCESS CONTROL ADDRESS		
3. CORRESPONDENCE ADDRESS		
Philips Electronics North American Corporation Intellectual Property & Standards 1109 McKay Drive, M/S-41SJ San Jose, California 95131 Phone: (408) 474-9073 Fax: (408) 474-9082		24738 PATENT TRADEMARK OFFICE CUSTOMER NUMBER
4. ENCLOSED APPLICATION PARTS		
<input checked="" type="checkbox"/> Specification (9 pages) <input checked="" type="checkbox"/> Drawing(s) (3 sheet(s)) <input checked="" type="checkbox"/> Return-Receipt Postcard		
5. METHOD OF PAYMENT		
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number 14-1270. Filing Fee Amount: \$160		

Date 2/5/04

Respectfully submitted,

By   
Michael J. Ure, Reg. No. 33,089  
(408) 474-9077

**DIGITALLY ENHANCED CORDLESS TELEPHONE AS PART OF A MEDIA  
ACCESS CONTROL ADDRESS**

**BACKGROUND OF THE INVENTION**

5       **1. Field of the Invention**

The present invention relates to Ethernet networking addresses. More particularly, the present invention relates to map generation between a radio identifier (DECT ID) and an Ethernet address, to permit DECT usage in a WMTS or other Ethernet-connected cordless system.

10       **2. Description of the Related Art**

Digital Enhanced Cordless Telecommunication (DECT), which originated as a European initiative, has become popular around the world to provide efficient wireless connectivity to many different types of applications, such as patient-wearable devices (PWD) in a Wireless Medical Telemetry System (WMTS). In wireless communications, there are devices  
15 that may operate under different protocols and communicate with an Ethernet LAN. In such a case, base stations or access points (AP's) have been known to translate from one protocol to another, such as from DECT to Ethernet. In particular, there is a need in the art for adapting between the DECT identity of a device and the Ethernet Media Access Control (MAC) address.

A DECT system comprises a DECT Fixed Part (FP) that utilizes one or more base  
20 stations or access points (APs), and at least one DECT cordless terminal or Portable Part (PP). DECT is virtually unlimited in the number of base stations and cordless terminals permitted. The DECT radio interface uses one or more of the following: Time Division Multiple Access (TDMA), Time Division Duplex (DDD) and Multi Carrier, and features Dynamic Channel Selection and Allocation. The Dynamic Channel Allocation permits DECT to adapt itself to  
25 changing environmental conditions, as compared with fixed channel-allocation mechanisms.

As shown in Figure 1, a 10ms TMDA DECT frame 105 comprises 24 slots that are further divided into two groups 107, 108, each having 12 slots. The first twelve slots are for use in forward transmission by the base station (or Fixed Part) to the portable, whereas the other twelve slots are used for reverse transmission from the portable to the base station. One slot for transmission and one for reception is referred to as a "duplex pair." One frame, which is equal to 24 slots X 480 bits = 11,520 bits = 10ms@ 1,152,000 bits per second. Each particular slot, as shown by the enlarged slot 110 comprises 32 bits for synchronization 111, 64 for signaling 113 (actually 48 for data and 16 bits of CRC in the A-field), 4 groups of 80 bits each in the B-field 115 each comprises 64 bit data blocks each followed by 16 bits CRC.

However, although the WMTS described here uses a frame which has the same slot size (480 bits) as DECT, the number of slots per frame is 64 (as compared with the 24 slots of DECT). In order to permit DECT to be used for WMTS which uses Ethernet for its infrastructure, the prior art lacks a way of generating a map between a radio identifier (e.g. DECT ID) and an Ethernet network address.

### SUMMARY OF THE INVENTION

The present invention provides a mapping between a 20-bit DECT PMID and an Ethernet MAC address by using a 1:1 mapping of the radio identifier and the low 20 bits of the Ethernet address. Each portable part calculates its PP ID from the bottom 20 bits of the unique Ethernet address assigned to it at the time of manufacture and each Fixed Part receives its FP ID

when the Access Points start up and register with the Access Point Controller. The present invention also provides an extended DECT frame for use with WMTS devices by providing a frame that uses 64 slots.

5

### **BRIEF DESCRIPTION OF THE DRAWINGS**

Fig. 1 illustrates a standard 24 slot frame as used in DECT, and an enlarged view of the 480 bits that comprise a standard slot.

Fig. 2 illustrates the main parts of a DECT software module, as modified according to the present invention.

Fig. 3 illustrates an extended DECT frame for WMTS using a 64 slot frame according to the present invention.

15

### **DETAILED DESCRIPTION OF THE INVENTION**

20

The following description is presented for purposes of illustration and is not intended to limit the instant invention to those items shown and described. An artisan will appreciate that various modifications can be made to the instant invention that lie within the spirit of the invention and the scope of the appended claims.

25

Ethernet has its own unique device addresses generally known as MAC addresses or Ethernet addresses, and it was designed to ensure that no two machines would end up with the

same Ethernet address. Moreover, to ensure the uniqueness of the addresses, the user does not have the capability to self-assign the addresses. Therefore, each controller using Ethernet comes with an address installed at the factory. To decrease the possibility that Ethernet addresses would run out, there are 48 bits allocated for address purposes. The present invention uses the  
5 lower 20 bits of the Ethernet address of each portable part (PP) to be mapped 1:1 with a radio identifier, such as a DECT identifier.

Fig. 2 shows the main parts of DECT software 200. The DECT software communicates with either an Access Point (AP) or PWD controller, identified by box 250. The DECT software comprises a boot loader 205 that loads the Digital Signal Processor 213. The DECT software  
10 also has a portable part (PP) or a fixed part (FP) application 210, and a DECT stack 215 that implements and manages connections between the portable part (PP) and fixed part (FP) applications. The boot loader 205 and PP or FP application are both in communication with the Patient Wearable Device (PWD) main board or Access Point main board 150. The DECT stack 215 has a slot controller that communicates with Digital Signal Processor (DSP) 213 and  
15 radio 217 used to transmit to the various wireless devices.

A standard DECT stack 215 supports 32 bits for device identifiers for connections between the PP and FP, with 20 bits being allocated to the PP ID and 12 bits being allocated to the FP ID. By extending the standard DECT frame for WMTS, it is possible for WMTS devices to use the DECT standard.

20 The Ethernet directly supports the sending of packets by using Medium Access Control (MAC) addresses in the source and destination fields of Ethernet packets. A procedure for mapping DECT PP or FP IDs to Ethernet MAC addresses is required to send datagrams. Radio module 217 would be used to transmit wireless communications to the PP's assigned to the PWD or Access Point 250.

One way that a DECT ID is mapped to an Ethernet address is by placing the 20-bits of the PP address of the radio identifier into the low-order 20 bits of an Ethernet address. The high-order 28 bits of the Ethernet address could be set to an agreed value in the WMTS system.

One result of the DECT addressing scheme is that the DECT stack limits the number of Access Points to 4096 (as 12 bits are allocated to the FP ID). When the Access Points start up and register with an Access Point Controller (APC) they will negotiate a unique set of FP IDs. The PP will calculate its PP ID from the 20 bottom bits of the Ethernet MAC address assigned to it from its manufacturing time. Thus the PPs effectively use the Ethernet MAC addresses and do not require a second set of addresses to be allocated.

The DECT stack 215 according to the present invention has been modified for use with WMTS by:

(1) The WMTS may use an extended DECT frame with 64 slots instead of the usual 24, in order to support a larger number of devices at lower data rate.

(2) The WMTS system may use a different number of RF carriers, and thus a different Primary Scan Carrier Number (PSCN) sequence.

(4) The WMTS may support mixed single and double slot bearers.

Fig. 3 illustrates an extended DECT frame for WMTS according to the present invention. The extended DECT frame comprises 64 slot periods, with the FP being capable of transmitting during slots 0-31 of the frame, and the portable part(s) being capable of transmitting during slots 32-63 of the frame. The slot controller, which is shown in Fig. 2 of the DECT stack, controls the slots, and the radio connections.

Various modifications may be made to the presently claimed invention that lie within the spirit of the invention and the scope of the appended claims. An artisan appreciates that the number of bits, whiled preferred to be the lower 20, could be a number higher or lower than that amount. The mapping, of course, would reflect the difference.

**What is claimed is:**

1. A method for generating a Portable Part Identity (PMID) of a WMTS (wireless medical telemetry device) that communicates using Digital Enhanced Cordless Telecommunications (DECT) comprising the steps of:

(a) providing a DECT stack module 200 comprising a portable part (PP) or a fixed-part (FP) application, wherein said DECT stack represents connections between the (PP) and (FP) as a 32 bit number, said (PP) comprising 20 bits and said (FP) comprising 12 bits;

(b) retrieving the 20 bits of the (PP) and storing in a memory map in the DECT stack as a DECT PMID; and,

(c) calculating a (PP) id from a lower 20 bits of an Ethernet assigned MAC address of the (PP) and storing same in the memory map in the DECT stack so that the 20 bits of the DECT PMID are mapped 1:1 with the lower 20 bits of the Ethernet MAC address.

2. The method according to claim 1, wherein the Ethernet assigned MAC address comprises 48 total bits.

3. The method according to claim 2, wherein the DECT stack communicates with one of an Access Point and a PWD (patient-wearable device) or other portable device.

4. The method according to claim 2, wherein the DECT stack includes a slot controller that controls a radio module that communicates with one or more portable parts.



5. The method according to claim 1, wherein an (FP) id is selected when at least one Access Point starts up and registers with an Access Point Controller.

6. The method according to claim 1, further comprising (d) said slot controller controls the radio module to transmit or receive an extended DECT frame being modified to comprise 64 slots for communication with (PPs) comprising WMTS devices.

7. The method according to claim 6, wherein during a first 32 slots of the 64 slot extended DECT frame, the (FP) can transmit and receive via the radio module, and during a second 32 slots of the extended DECT frame, the (PP) can transmit and receive via the radio module.

8. A map for a DECT stack module 200 modified for use with a Wireless Medical Telemetry Systems (WMTS) device, wherein said DECT stack modules includes a DECT stack comprising a portable part (PP) and a fixed-part (FP) software application module, wherein said DECT stack represents connections between the (PP) and (FP) as a 32 bit number, said (PP) comprising 20 bits and said (FP) comprising 12 bits, said map comprising:

20 bits of the (PP) are stored in the memory map as DECT PMIDs; and

a lower 20 bits of an Ethernet assigned MAC address of the (PP) are stored in the memory so that the 20 bits of the DECT PMID are mapped 1:1 with the lower 20 bits of the Ethernet MAC address.

9. The map according to claim 8, wherein the Ethernet-MAC-assigned address from which the lower 20 bits are selected comprises a total of 48 bits.

10. An extended DECT frame for use with Wireless Medical Telemetry Systems (WMTS) transmission, said extended frame comprising 64 slots, wherein during a first 32 slots of the 64 slot extended DECT frame transmitted, a (FP) is permitted to transmit and receive via a radio module, and during a second 32 slots of the extended DECT frame a (PP) is permitted to transmit and receive via the radio module.

**ABSTRACT OF THE DISCLOSURE**

A method for mapping a Portable Part MAC (Media Access Control) Identity (PMID) of a WMTS (wireless medical telemetry device) that communicates using Digital Enhanced Cordless Telecommunications (DECT) comprising the steps of: (a) providing a DECT stack module 200 comprising a portable part (PP) and a fixed part (FP) application, wherein said DECT stack represents connections between the (PP) and (FP) as a 32 bit number, said (PP) comprising 20 bits and said (FP) comprising 12 bits; (b) retrieving the 20 bits of the (PP) and storing in a memory map in the DECT stack as a DECT PMID; and, (c) calculating a (PP) id from a lower 20 bits of an Ethernet-MAC- assigned address of the (PP) and storing same in the memory map in the DECT stack so that the 20 bits of the DECT PMID are mapped 1:1 with the lower 20 bits of the Ethernet MAC address. A memory map in the DECT Stack or external thereto stores the result of the mapping function.

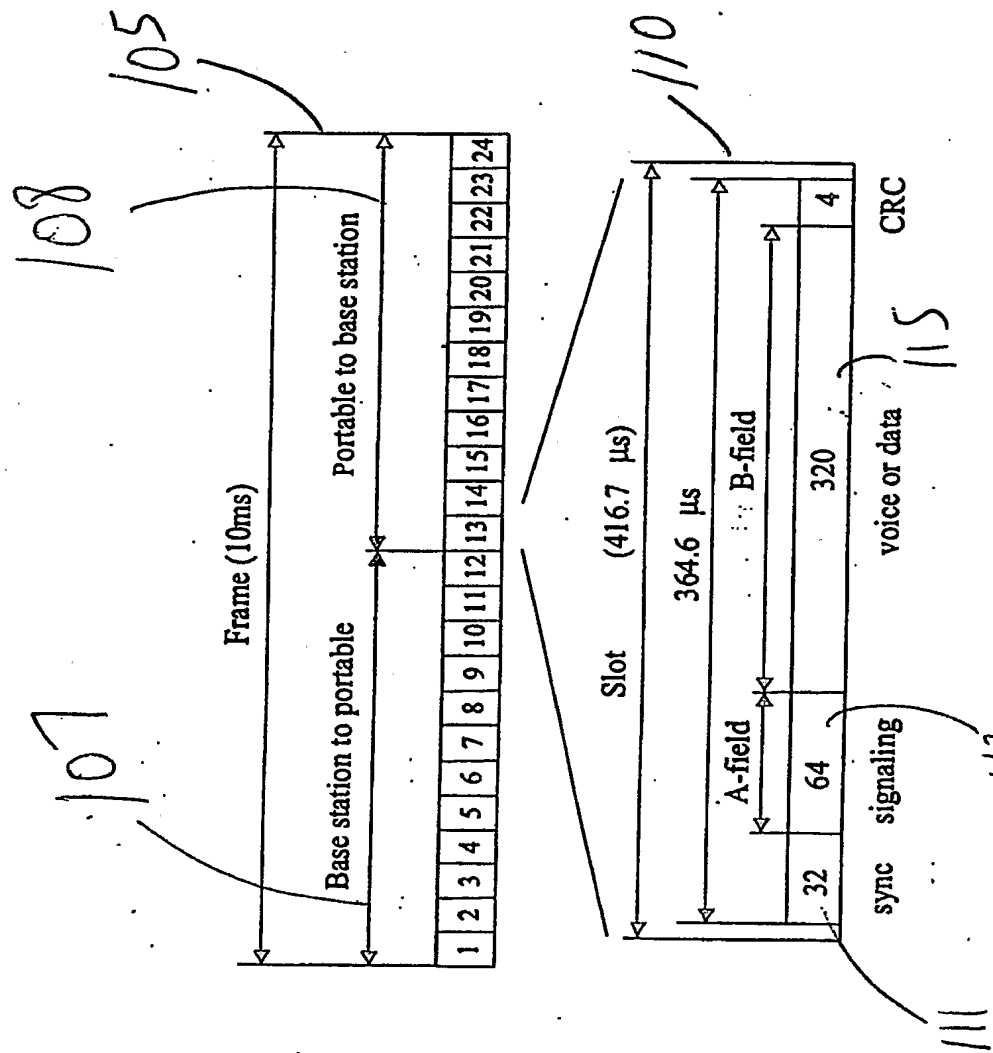


Fig. 1

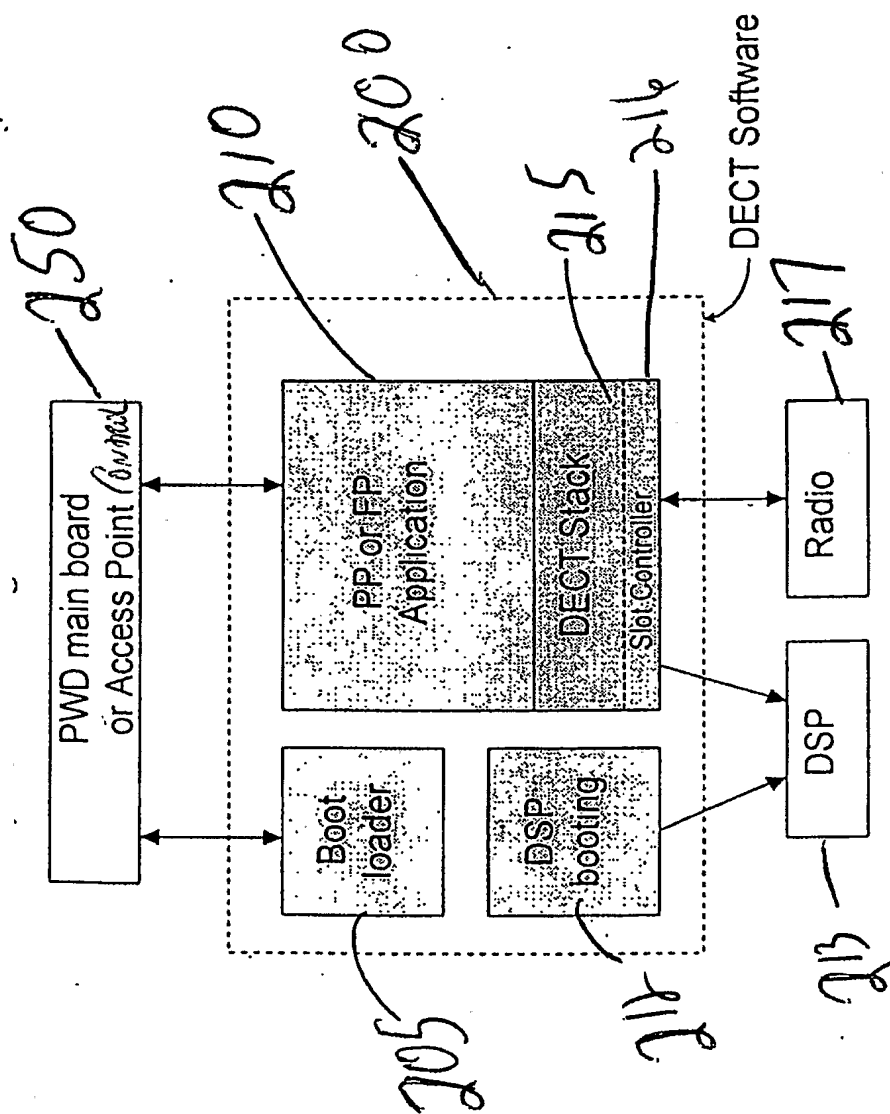


Fig. 2

DESIGN AVAILABLE COPY

The WMTS uses the same slot size (480 bits) and bit rate (1,152,000 bits per second) but has 64 slots per frame:

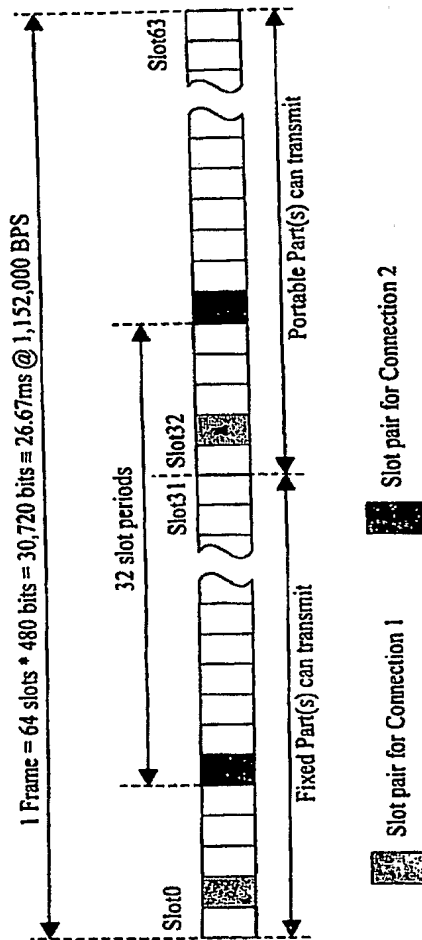


Fig. 3

BEST AVAILABLE COPY